

QM1610

1610

The QM1610 Is The Versatile Answer For Coding.



► Up To Two Lines Of Printing. Compact Design.


MSSC QM1610 Inkjet Printers make printing product names, identification numbers, automatic production counts and up-to-the-minute coding fast and easy with just the touch of a button. This versatile performer can print one or two lines of text and is simple to program.

QM1610 Inkjet Printers feature:

- Prints one or two lines of text using a variety of selectable languages and printable characters
- Menu-driven programs include electronically accurate automatic date change, clock functions, and consecutive counts
- Marks cartons and provides production information vital for inventory and quality control

Additional Features:

- Easy-to-use icon keys allow you to adjust and edit product codes with a few simple keystrokes
- Delivers an all-in-one, low cost solution from high ink mileage to low maintenance requirements
- Hard-working design provides outstanding reliability and unsurpassed performance
- Can be assembled and installed in minutes; simply plug it in and you are ready to print
- Mounted directly to a conveyor, it includes: controller/ keypad, printhead, power supply, power cord, mounting brackets and a pressurized ink bottle

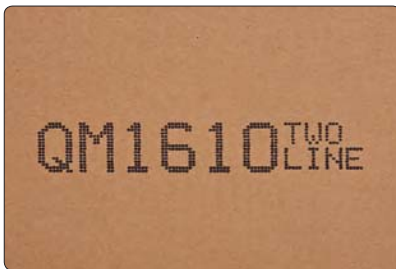

Porous print

System Includes

- Controller/input device; print head; universal power supply; mounting bracketry and a bottle of porous ink

Built-in Software Features

- Customized time and date codes
- Rollover hour
- Expiration date for automatic printing
- Shift organizer for automatic coding by particular shifts (up to 4 shifts)
- Print delay for message placement
- Character width adjustment
- Variable speed or fixed speed printing
- Consecutive incremental numbering

Operating Languages

- English, French, Italian, German, Swedish, Portuguese, Spanish, Norwegian, Finnish, Turkish, Hungarian, Dutch, Polish, Russian, Cyrillic (menu selected)
- Special application units include: Simplified Chinese, Traditional Chinese, Japanese, Korean, Thai, Arabic

Print Heights

- Standard print height: 1 in (25 mm)
- Optional heights: 0.75 in (20 mm), 1.25 in (32 mm), 1.9 in (48 mm)

Character Fonts

- 7x5 dot matrix
- 16x10 dot matrix

Conveyor Line Speed

- 20 ft/min (6.1 m/min) to 200 ft/min (61.0 m/min)

Message Length

- Up to 40 characters of 16 dot font or two 80 character rows of 7 dot font

Operating Temperature Range

- 40° F to 120° F (4° C to 49° C)

Electrical

- System uses universal switching power supply. 100 - 240V at 50/60 Hz

Print Sensor

- Internal sensors included; external sensor is optional

Ink System

- Internally regulated ink system
- Factory set
- No adjustment necessary

Ink

- 8 oz (0.23 liter) bladder pressurized, non-aerosol ink bottle

Shipping Weight

- 11.45 lbs (5.19 kg)

Mounting Bracketry

- 15 and 9 in (38.9 and 22.8 cm) tubing with 1 in (2.54 cm) outside diameter (OD)
- Optional hand levers can be installed for simple up/down and in/out adjustments
- Optional bracketry for special installations
- Long reach bracket kit available for special mounting situations



The choice is simple.

For more information on QM1610 Printers, visit www.msscllc.com or call (800) 854.8905.

Scan for more info

